



SET UP

On the wall

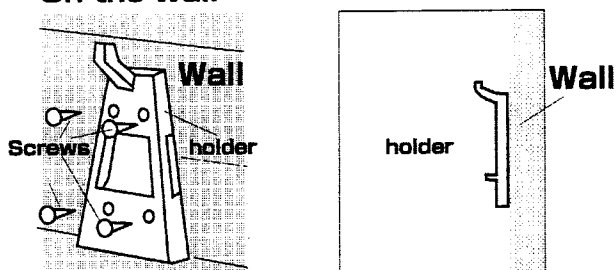


Do not use rubber base when fixing the holder to the wall with screws.
Find vertical wall when screwing the holder.

(How to mount onto the hook board)

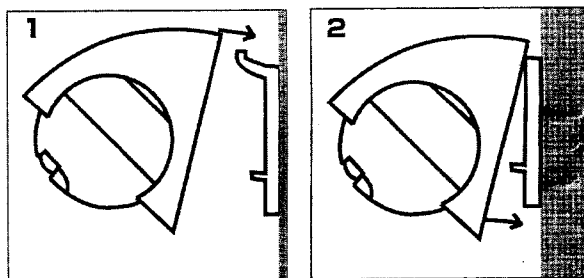

Set the main body on the hook. Push the body until there is no space between the body and the holder.

On a pillar or pole : Use the rubber base

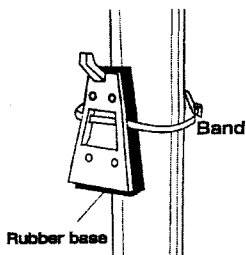


Attach the rubber base to the holder and fix it to the pillar with a band.

- Perimeter of a pillar : 8~23cm
- Diameter of a pole : 2~9.5cm
- Use the rubber base to prevent slipping and falling.
- Make sure the hook is upward when fixing the holder.
- Nail the holder if there is danger of falling.
- Make sure that the holder is fixed tightly.


(How to set up with a band)

● Attach

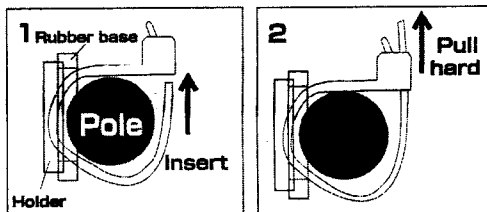


● Detach

Pull the band while pushing down the lever.




- This band can easily be attached or detached. Remove the band as shown in the picture left.
- Ensure the main body is removed while adjusting band to prevent falling off.

On a table

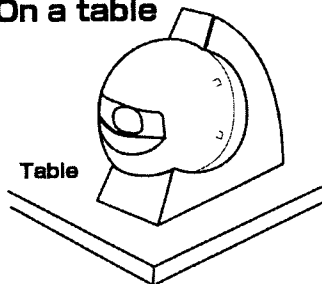



- Choose flat area where the body will stay safely.
- Remove the rubber base and holder when placed on a table in order to prevent tipping over.

(Adjusting the angle of the main body)


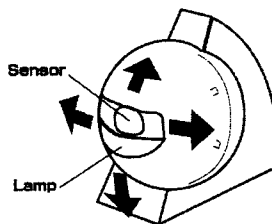


The body rotates up and down as well as right and left against the holder. Do not rotate it too far to hide the sensor and lamp into the holder. Otherwise, the sensor will not operate or the light will get dim.

CAUTIONS FOR SETTING UP


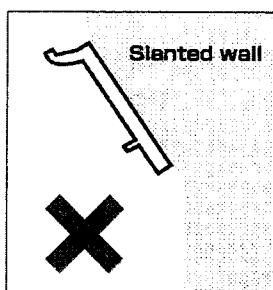
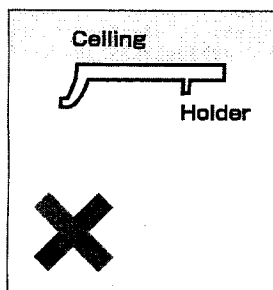


Do not set up on the slanted wall or ceiling as in the picture above, otherwise the main body will fall off from the holder.

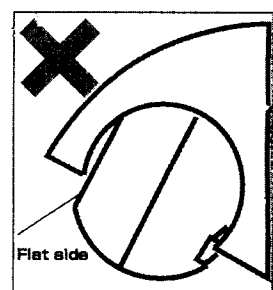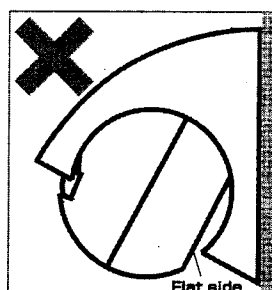

If the main body is set in the angle as in the above picture, the main body may fall off from the holder. After adjusting the angle, make sure that it will not fall off.

○ Precautions in outdoor set-up



Do not position sensor part in an upward direction (exposure to rain may cause damage).

DIRECTIONS FOR USE

- Switch will be automatically on once batteries are in.
- Remove the batteries if you need to turn it off.
- Light is on for 60 seconds once batteries are in and if a human presence is detected during this time, the lighting time will be extended.
- After the initial lighting ceases, when somebody gets into detection area, it will turn on a light only when it is dark. If the person moves in the area, the lighting time will be extended and automatically be turned off when the person moves out of the area.
- Change batteries when light becomes not bright enough nor turns off correctly.